

"High Frequency Ceramic Solutions"

1.57 GHz Antenna

P/N 1575AT47A0040

Detail Specification: 10/27/09

Page 1 of 6

General Specifications

Part Number	1575AT47A0040
Frequency Range	1555 - 1595 Mhz
Peak Gain	-1.0 dBi typ. (XZ-V)
Average Gain	-3.0 dBi typ. (XZ-V)
Return Loss	9.5 dB min.

Input Power	3W max.
Impedance	50 Ω
Operating Temperature	-40 to +85°C
Reel Quantity	1,000

No.	Function	Terminal Configuration
1	INPUT	
2	NC	

Mechanical Dimensions


	In	mm
L	0.394 ± 0.008	10.00 ± 0.20
W	0.118 ± 0.008	3.00 ± 0.20
T	0.030 ± 0.008	0.77 ± 0.20
a	0.030 ± 0.008	0.75 ± 0.20

Mounting Considerations (Close Up)

Mount these devices with brown mark facing up. Units: mm


* Line width should be designed to provide 50Ω impedance matching characteristics.

With Matching Circuit (Horizontal Mounting Situation)

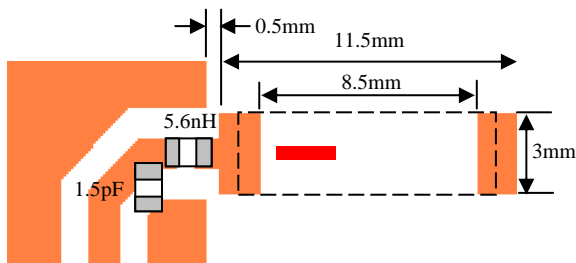

JTI P/N for Matching Circuit:
Cap (1.5pF): 500R07S1R5BV4T
Inductor (5.6nH): L-07C5N6SV4T

With Matching Circuit (Vertical Mounting Situation)

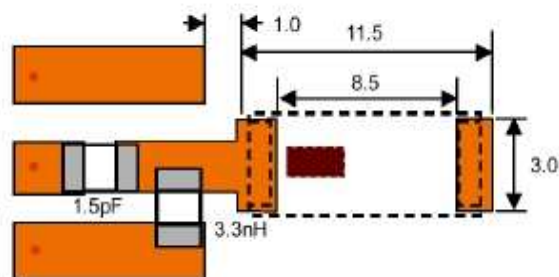

JTI P/N for Matching Circuit:
Cap (1.5pF): 500R07S1R5BV4T
Inductor (3.3nH): L-07C3N3SV6T

(Matching components, if used, will vary in value depending on PCB layout)

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


1.57 GHz Antenna

P/N 1575AT47A0040

Detail Specification: 10/27/09

Page 2 of 6

Mounting Considerations

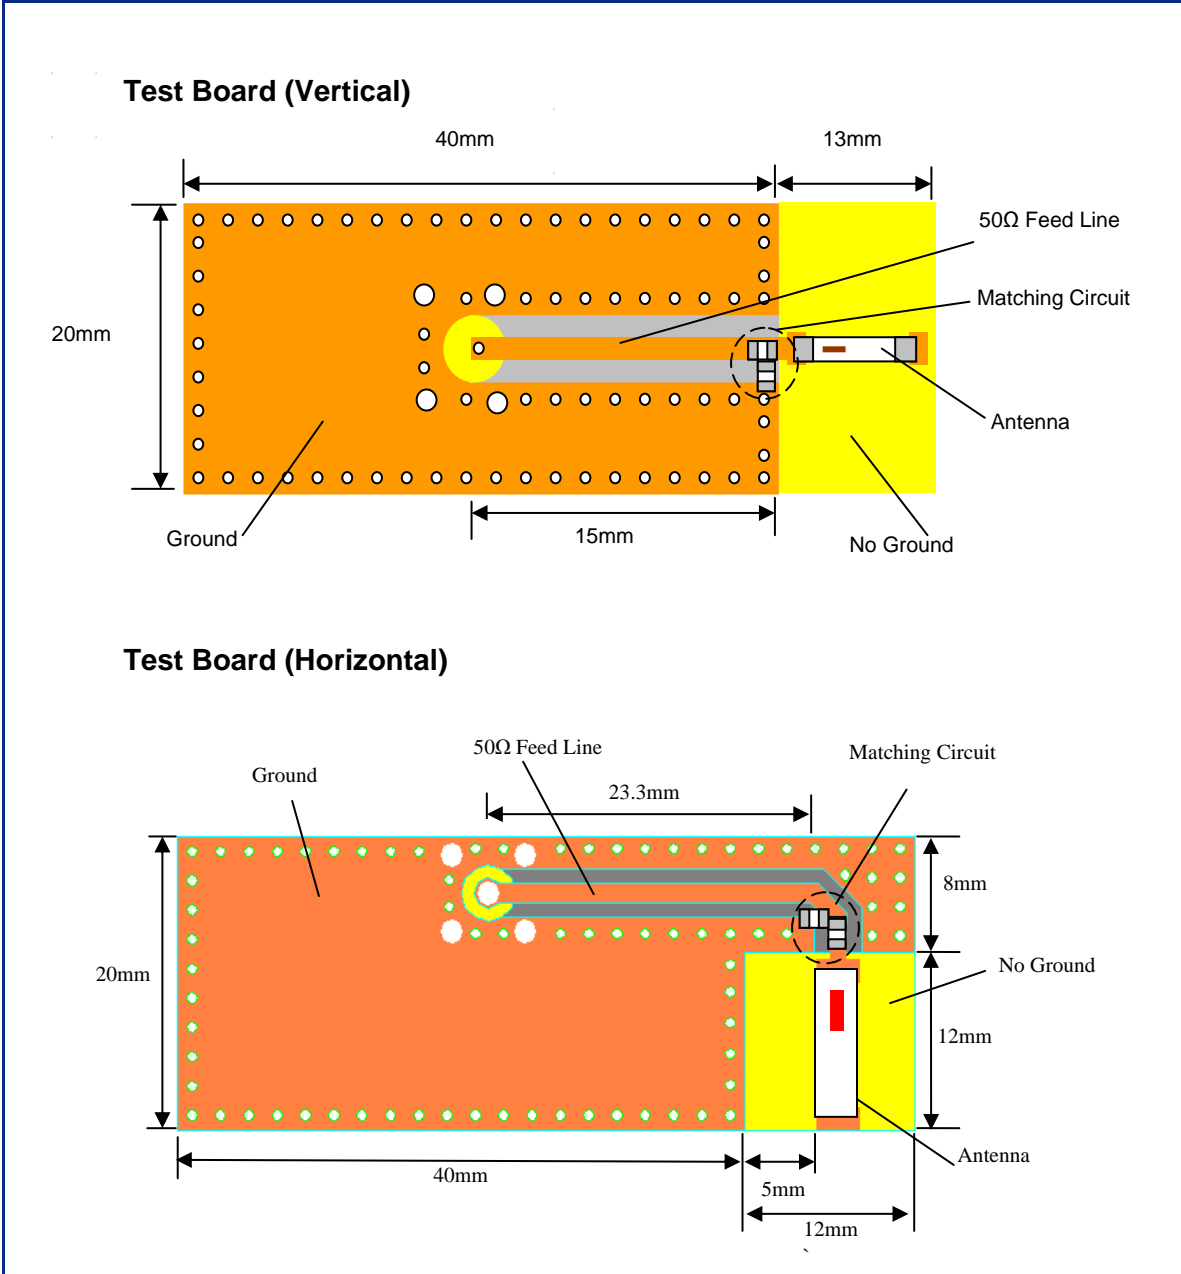

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2009 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

1.57 GHz Antenna

P/N 1575AT47A0040


Detail Specification: 10/27/09

Page 3 of 6




Typical Electrical Characteristics (T=25°C)

Return Loss

**Vertical Test Board
(without matching components)**

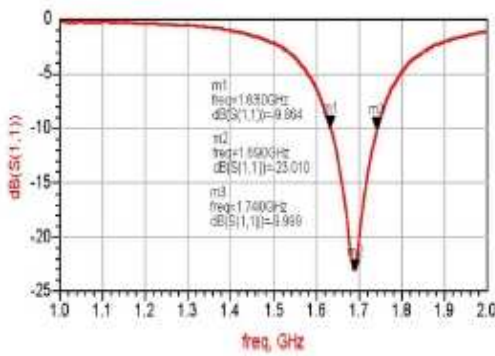

**Vertical Test Board
(with matching components)**

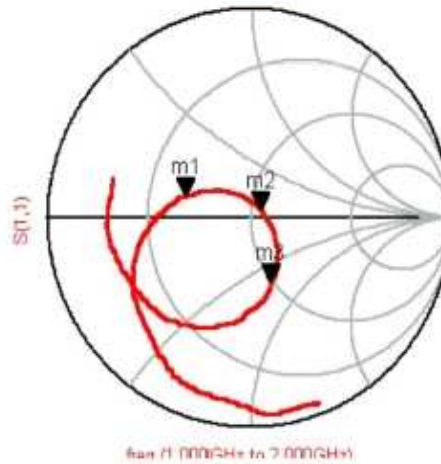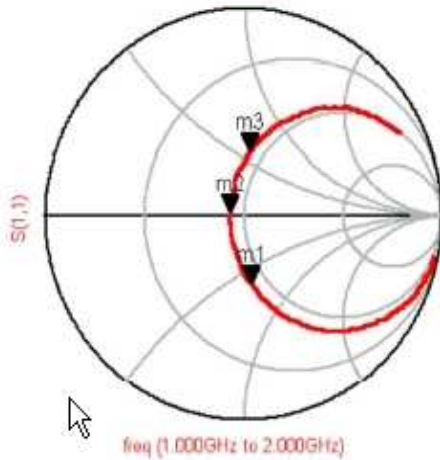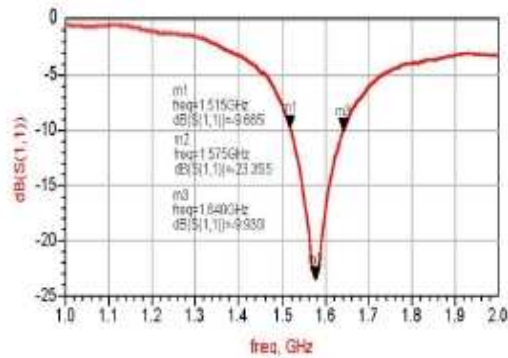

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"

1.57 GHz Antenna

P/N 1575AT47A0040


Detail Specification: 10/27/09

Page 4 of 6




Typical Electrical Characteristics (T=25°C)

Return Loss

**Horizontal Test Board
(without matching components)**

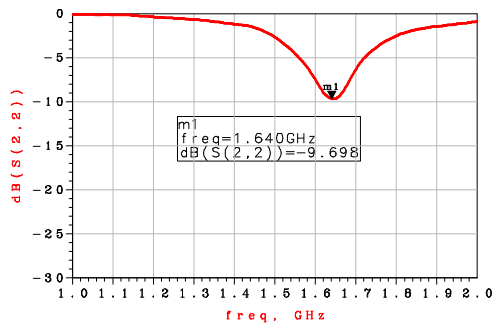

**Horizontal Test Board
(with matching components)**

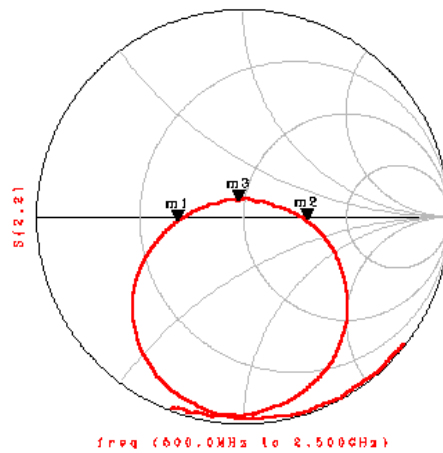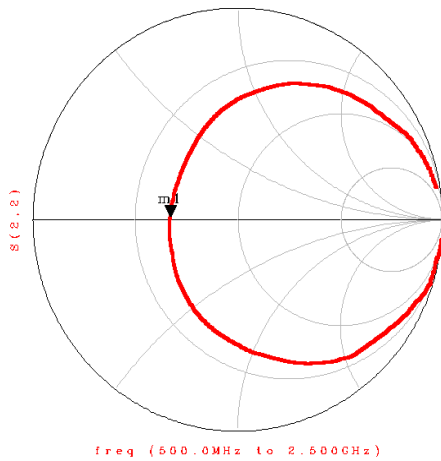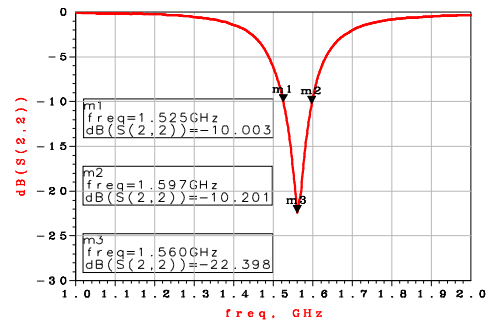

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2009 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


1.57 GHz Antenna

P/N 1575AT47A0040

Detail Specification: 10/27/09

Page 5 of 6

Typical Radiation Patterns (Vertical Test Board)

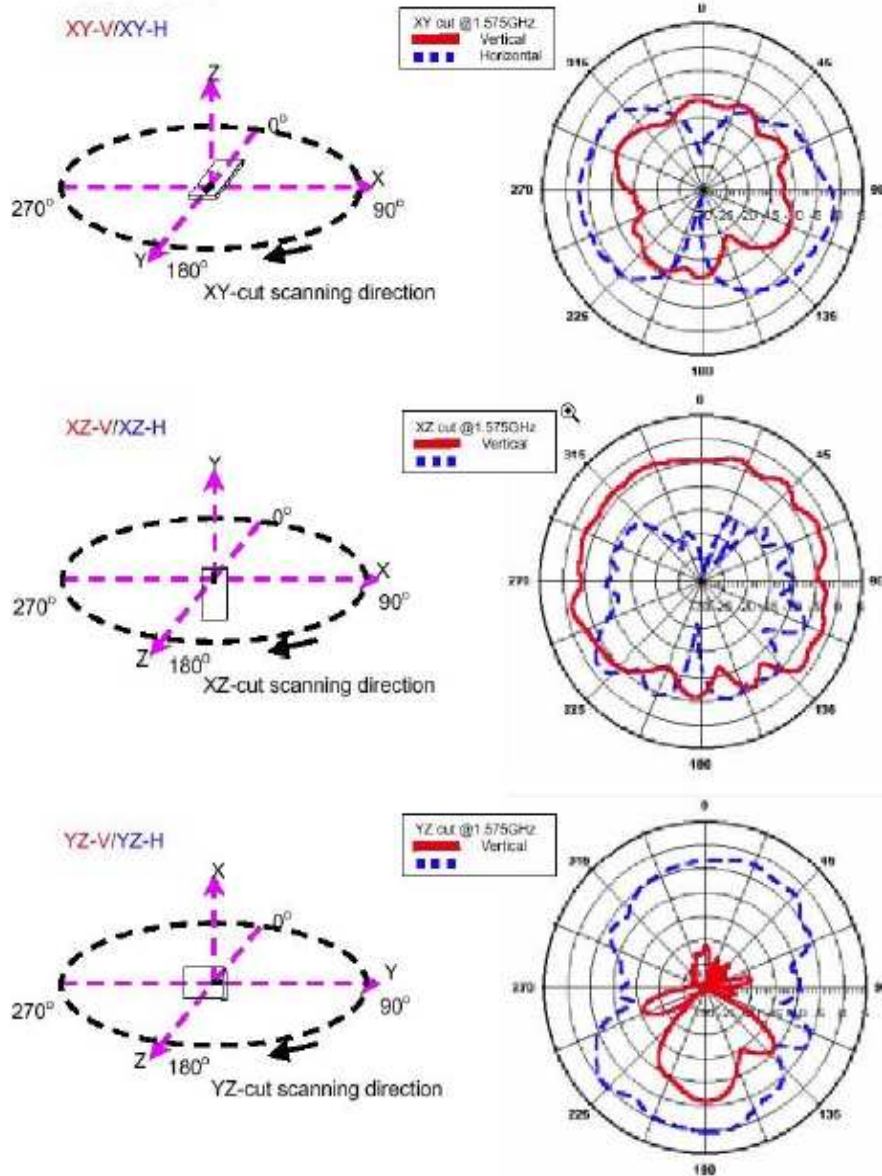

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2009 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


1.57 GHz Antenna

P/N 1575AT47A0040

Detail Specification: 10/27/09

Page 6 of 6

Typical Radiation Patterns (Horizontal Test Board)

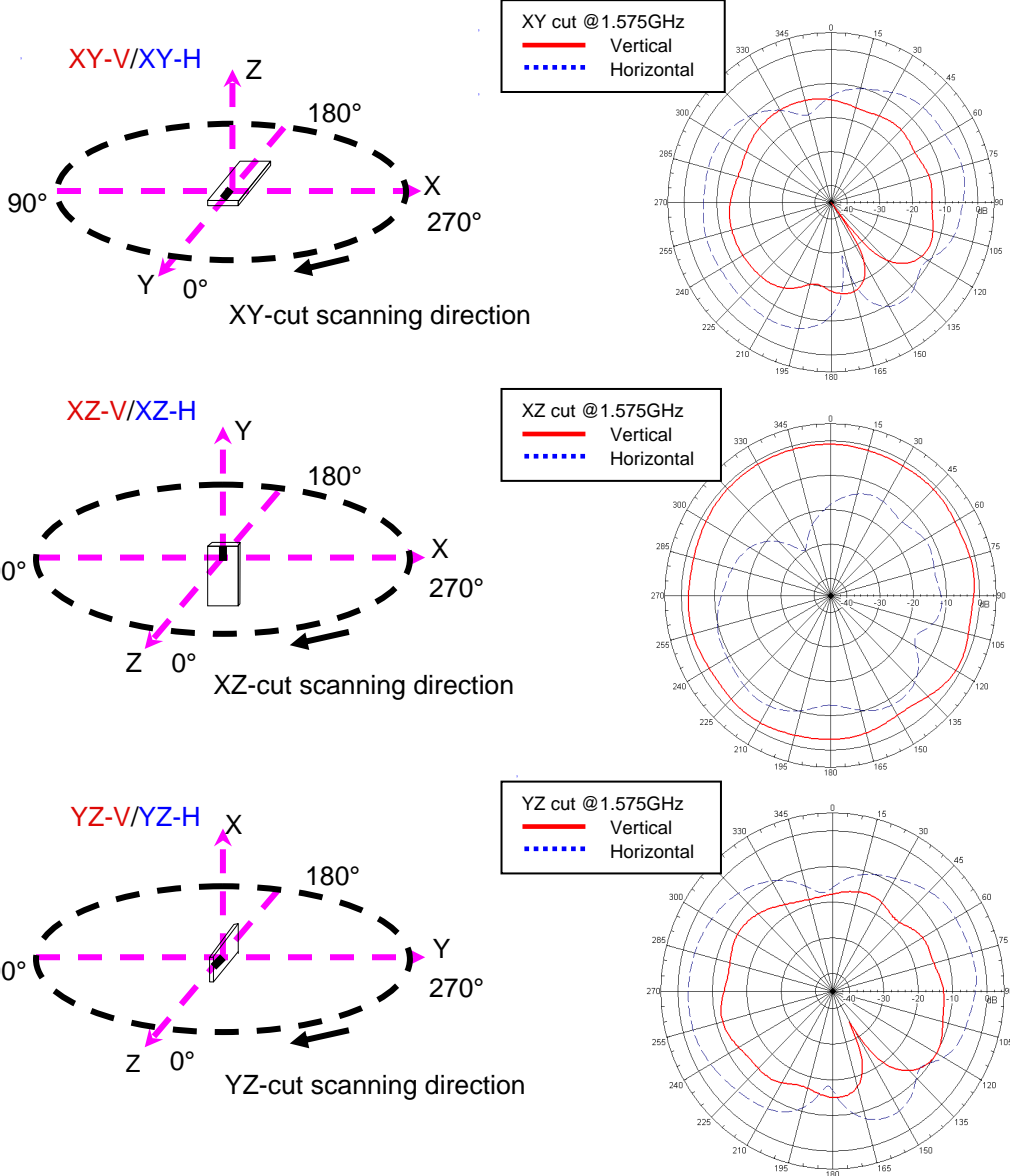

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2009 Johanson Technology, Inc. All Rights Reserved