

GPS/GLONASS&GSM Combination Screw Mount Antenna

Part No:AC-GPS(GNSS)/GSM-03

1. Introduction

The GPS GLONASS combo antennas have been designed to provide maximum performance and versatility for telematics applications, including fleet monitoring and asset tracking.

The antennas precise performance and easy of installation provides outstanding value and flexibility for the most demanding wireless mobile applications.

Magnetic mount, and permanent adhesive mount will be choose.

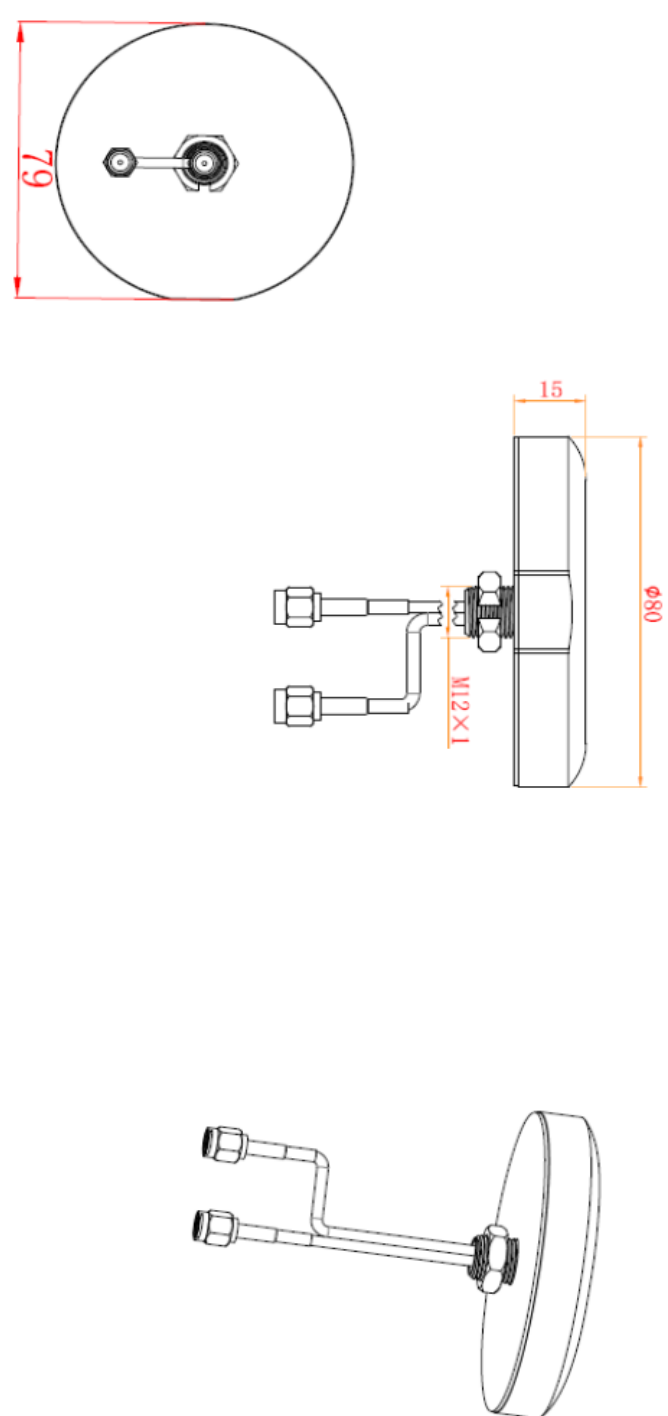

It is good use to put it on top of the car, and then take it for travel.



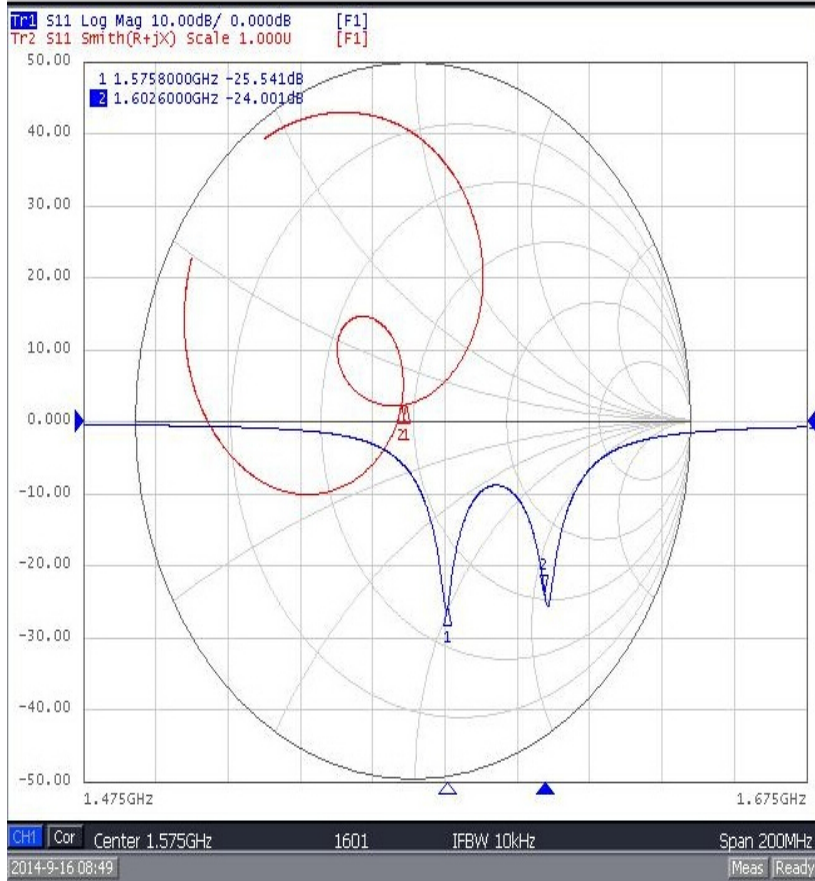
2. Specification

Electrical		
GPS(GNSS) Part:	Dielectric Antenna	
	Frequency Range	1575.42MHz±3 MHz
	Polarization Type	RHCP
	Gain	2dBi
	V.S.W.R	<1.5
	Impedance	50Ω
	LNA	
	LNA Gain	28±2dB Typical
	Noise Figure	1.5dB
	Ex-band Attenuation	12dB@CF+50MHz/16dB@CF-50MHz
	V.S.W.R	<2.0
	Voltage	2.7/3.0/3.3/5.0/3.0 to 5.0 etc.
	Current Consumption(mA)	11 Max
	GSM Part:	Frequency range
V.S.W.R		<2.0
Gain		2dBi
Polarization		Linear
Impedance		50Ω
Mechanical		
	Housing	Black
	Cable	2xRG174
	Length	2x3/5M or can be customization
	Connector	2xSMA Male or can be customization
Environmental		
	Working Temp	-40℃~+80℃
	Humidity	55%-75%RH
	Waterproof	IP65
	Antenna Radome Material	ABS
	Mounting way	Screw Mount
	Antenna Dimension	Φ80x15mm
	Weight	150g
	RoHS Compliant	YES

3.Drawing

Drawing		Product Type Combination-ANT		P/N:AC-03	
					
technology: RoHS					
3					
2	STANDARD	P/No:	 ASIAN CREATION COMMUNICATION CO.,LTD www.acantenna.com		
1		SPEC	2012AC-03	Qty	1PCS
		MATERIAL	AC-03	Weight	125g
		DWG NO.		REV	A
		SHEET	1/1	投影法	
			UNIT	MM	
				DR.	Y.J.P
				VENDER	VVIS
				CHKD	BEN
				DAY	2020-9-9

4.V.S.W.R GPS&GLONASS



GSM

